



LUGGAGE RACK RISERS

7154

FITS: ALL '01-UP GL1800'S; FOR USE WITH KÜRYAKYN LUGGAGE RACK P/N 7151. UNIVERSAL FIT APPLICATION ON 1/2" TUBE RACK LEGS.

PARTS INCLUDED

- 4 Luggage Rack Spacer
1 Hardware Kit including:
2 #10-24 x 2" BSCS
2 #10-24 x 1-3/4" BSCS
4 Spacer, .2 x .75 x .125
4 Spacer, .2 x 1.00 x .125
4 1/4" SAE Flat washer
1 Installation Instructions

Please read and understand entire instructions before starting installation.

THANK YOU FOR CHOOSING KÜRYAKYN!

PLEASE NOTE

It is the installers' responsibility to make sure all fasteners (including pre-assembled) are tightened before operation of motorcycle. Kuryakyn will not warranty components that are lost due to improper installation. Periodic maintenance may be required.

TOOLS SUGGESTED

Phillips screwdriver, set of hex wrenches, 1/4" drill bit and drill,

ATTENTION! A factory service manual may be helpful in performing this installation. Do not attempt to perform this installation if you are not confident in your ability to complete all steps in the procedure; consult a trained technician.

ATTENTION! This procedure requires making permanent modifications to the trunk lid; this may void your warranty. Consult your dealer for more information.

CAUTION! AVOID POTENTIAL ELECTRICAL SHOCK! BE SURE TO DISCONNECT THE BATTERY BEFORE STARTING THIS PROCEDURE.


PROCEDURE

STEP 1 Park motorcycle on a hard, level surface. Shut the ignition off. If equipped, put the motorcycle on center-stand.

STEP 2 Disconnect the battery.

STEP 3 Open the top trunk lid; remove the 15 screws securing the plastic underside of the lid. Save the hardware for later use. See PIC.1.

STEP 4 Remove the two screws on each latch ring. See PIC.1.

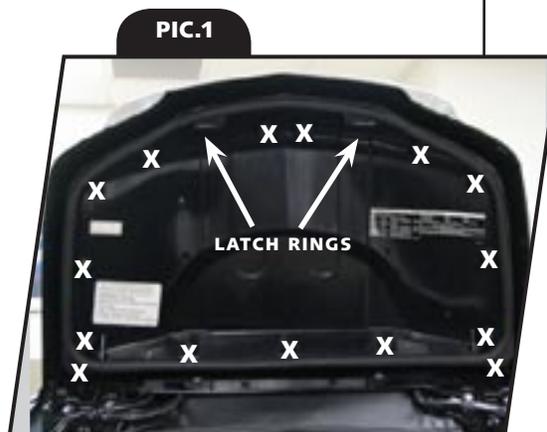

SCREWS SECURING UNDERSIDE OF LID ARE MARKED WITH AN X

CUSTOMER SERVICE
877.370.3604 (toll free)

INSTALLATION QUESTIONS
techsupport@kuryakyn.com
or call 715.247.2983

LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials and workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

- Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
- The product must be properly installed, maintained and operated under normal conditions.
- Kuryakyn makes no warranty, expressed or implied, with respect to any gold plated products.
- Kuryakyn shall not be liable for any consequential and incidental damages, including labor and paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn and a customer.
- Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
- Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. Components of Kuryakyn products containing L.E.D.s will be warranted for defects in materials and workmanship for 3 years from the date of purchase.
- Kuryakyn makes no warranty of any kind in regard to other manufacturer's products distributed by Kuryakyn. Kuryakyn will pass on all warranties made by the manufacturer and where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.

ABOUT OUR CATALOG

You'll find all our innovations for H-D, GL and Metric Cruisers in our annual catalogs. Order online today-select the "CATALOGS" icon. Each Kuryakyn product comes with a Proof-of-Purchase good for a complimentary catalog. Details in packaging.

Be sure to ask your local dealer about other Kuryakyn products, the motorcycle parts and accessories designed for riders by riders.

©2005 Kuryakyn USA All Rights reserved.



**STEP 5** Pull the trunk lid underside down; disconnect the multi-pin connector. See [PIC.2](#).

**STEP 6** Set aside the trunk lid underside.

**STEP 7** Remove the existing luggage rack and hardware; save for later use. It is recommended that the existing rack mount holes in the trunk lid be enlarged with a 1/4" drill bit to allow for alignment and ease of installation.

**NOTE** For installation where a trunk spoiler is already installed, ensure that there is enough clearance to install rack risers before drilling any holes.

**STEP 8** Insert a 1-3/4" screw, washer and small rubber spacer through the underside of the trunk lid in one of the front holes. See [FIG.1](#).

**STEP 9** Install a large rubber spacer and rack riser over the protruding end of the screw on the topside of the trunk lid. See [PIC.3](#), [PIC.4](#) and [FIG.1](#).

**STEP 10** Repeat STEP 8 and STEP 9 for the other front hole.

**STEP 11** Carefully hold the rack in position and begin the threads of the screws into the rack; do not fully tighten the screws. Allow the rack to "hang" while the rear screws are prepared. See [PIC.5](#).

**STEP 12** Install a 2" screw, washer, small rubber spacer through one of the rear holes in the trunk lid.

**STEP 13** Place large rubber spacer and rack riser over the protruding end of the screw; repeat for the other side.

**STEP 14** Thread the rear screws into the rack. Do not fully tighten screws.

**STEP 15** Close trunk lid; center rack on lid

**STEP 16** Carefully open the lid; tighten screws.

**STEP 17** Reinstall trunk lid underside; reconnect multi-pin connector.

**STEP 18** Reinstall 15 screws securing trunk lid underside to lid.


**STEP 19** Reinstall latch rings and screws.

**STEP 20** Check for proper lid operation. Re-connect the battery


*Ride On!*

**Kuryakyn**


**PIC.2**

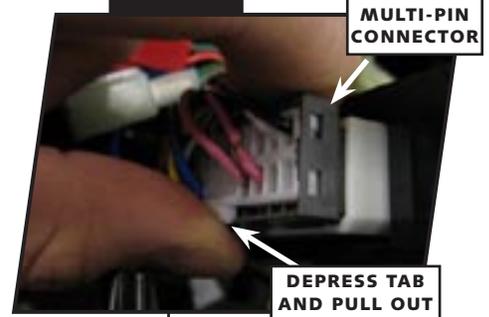

**PIC.3**

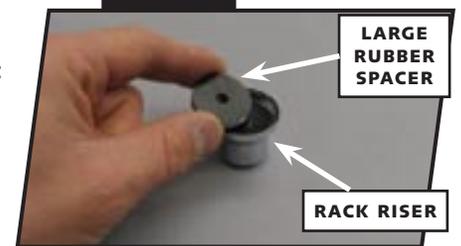


**PIC.4**

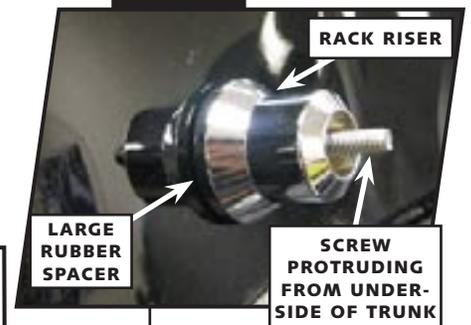

**PIC.5**



**FIG.1**

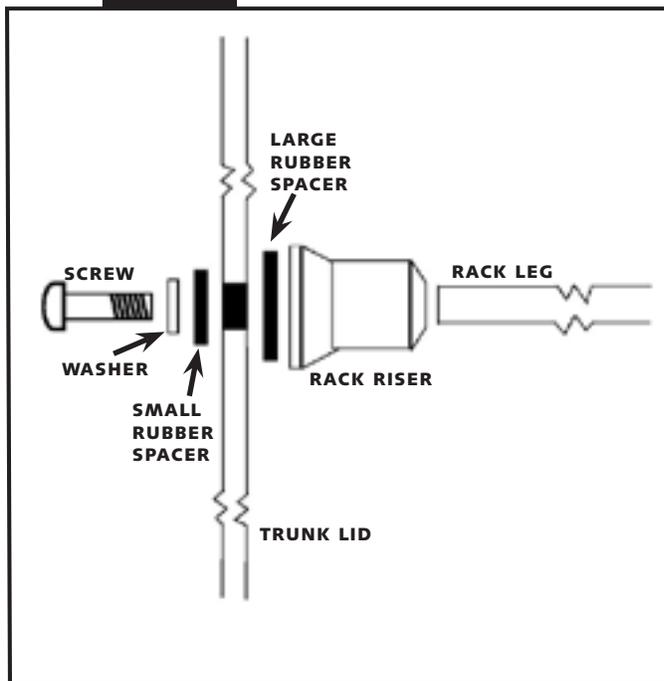

**PAGE**

**2**

**LUGGAGE RACK RISERS INSTALLATION**